
An L-shaped kitchen. Dining for six.


Clear ceilings: ground 3.00 m / upper 2.80 m | Floor-to-floor 3.40 m, provisional | Plans at 1:100 on A3 at 100%

01 GROUND FLOOR



02 UPPER FLOOR

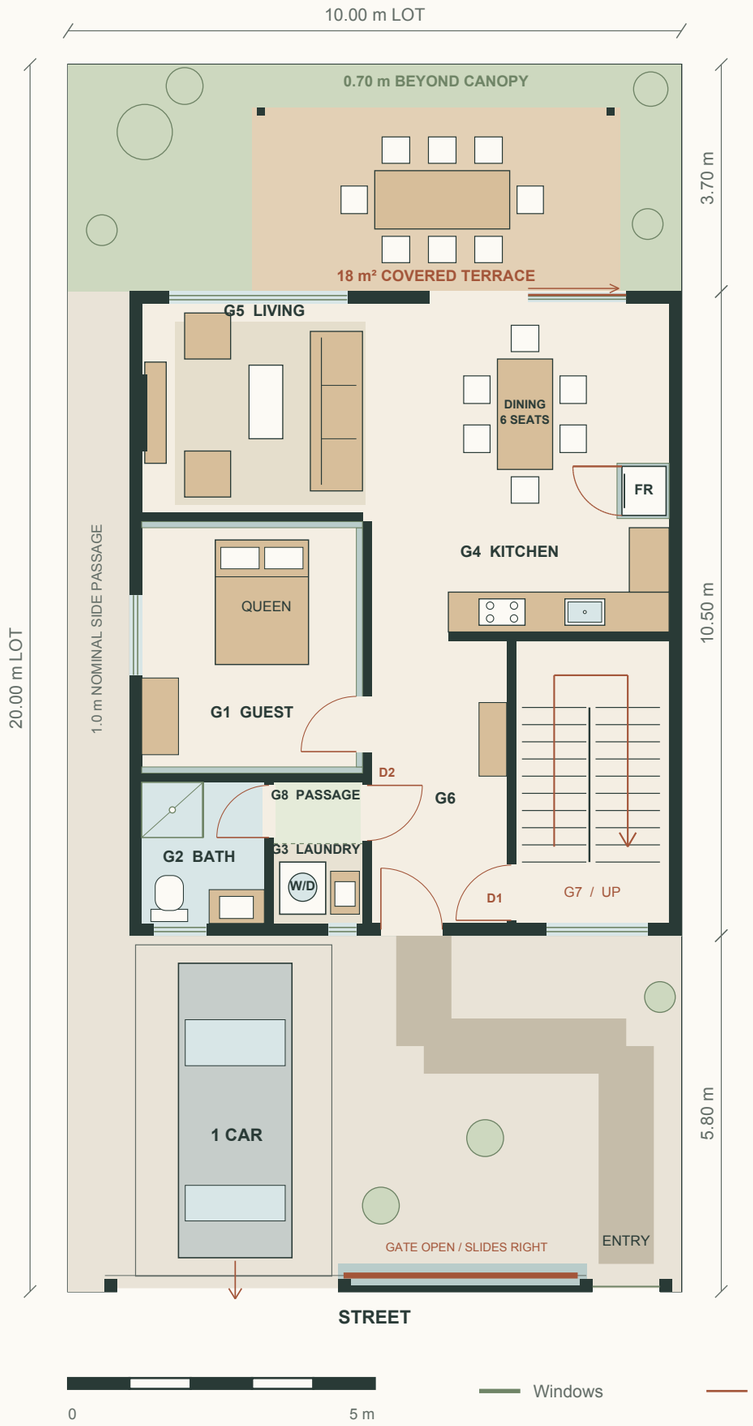



3 bedrooms / 2 full bathrooms

Queen guest room downstairs; king primary and two-double guest room upstairs. Each floor has one shared, hall-accessed bathroom. Neither bedroom upstairs is an en suite.

The proposed fit

SPACE / ITEM	m²	ft² / ref.
Ground floor	94.5 m²	1,017.2 ft²
Upper, less stair void	77.4 m²	833.4 ft²
Combined floors	171.9 m²	1,850.6 ft²
Covered terrace, extra	18.0 m²	193.8 ft²

Gross areas include walls. Bedroom dimensions on page 6 now deduct the reserved acoustic linings. Metric dimensions govern; feet are rounded references.

Noise-control changes

TV moved to the left exterior wall. D1 closes the stair; D2 encloses the laundry and service passage. Blue-green bands reserve 0.10 m for bedroom acoustic linings. Details and specifications: pages 4-5.

Room arrangement

Ground / social + guest

G1 queen room; G2 front shared bath; G3 laundry; G4/G5 open kitchen, living and six-seat dining (page 7); G6 entry; G7 stair; G8 service passage. Sliding vehicle gate: page 9.

Upper / shared bath

U1 two-double room; U2 open shared bath with a far-end shower, toilet and double vanity; U3 linen; U4 dressing/storage; U5 primary; U6 hall; U7 stair arrival.


Still schematic

Setbacks, boundary-wall permission, floor elevation, structure and services need local review. A windows + B roofs retained: page 10. Roof/drainage: pages 11-13. No surveyed north is asserted.


Both bathrooms, with clear indoor access.

Enlarged bathroom studies / both at 1:30 on A3 at 100% / meter and feet reference columns below

Ground / bathroom and laundry

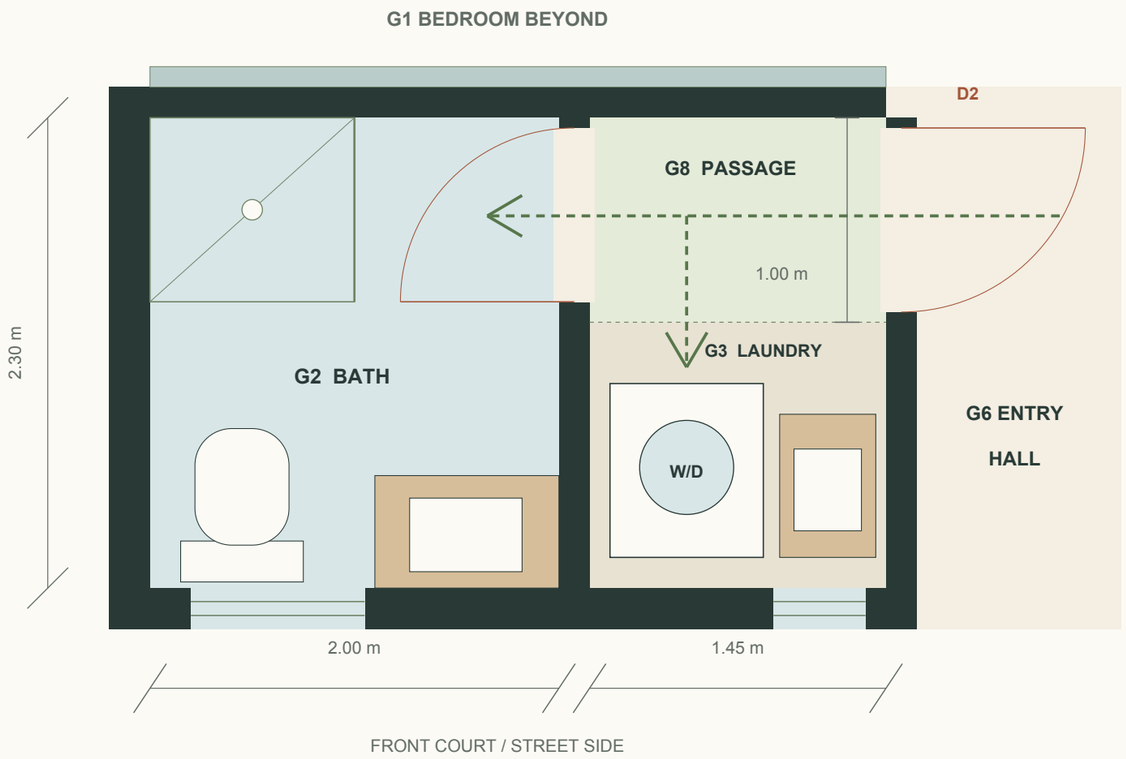

Upper / shower at the far end

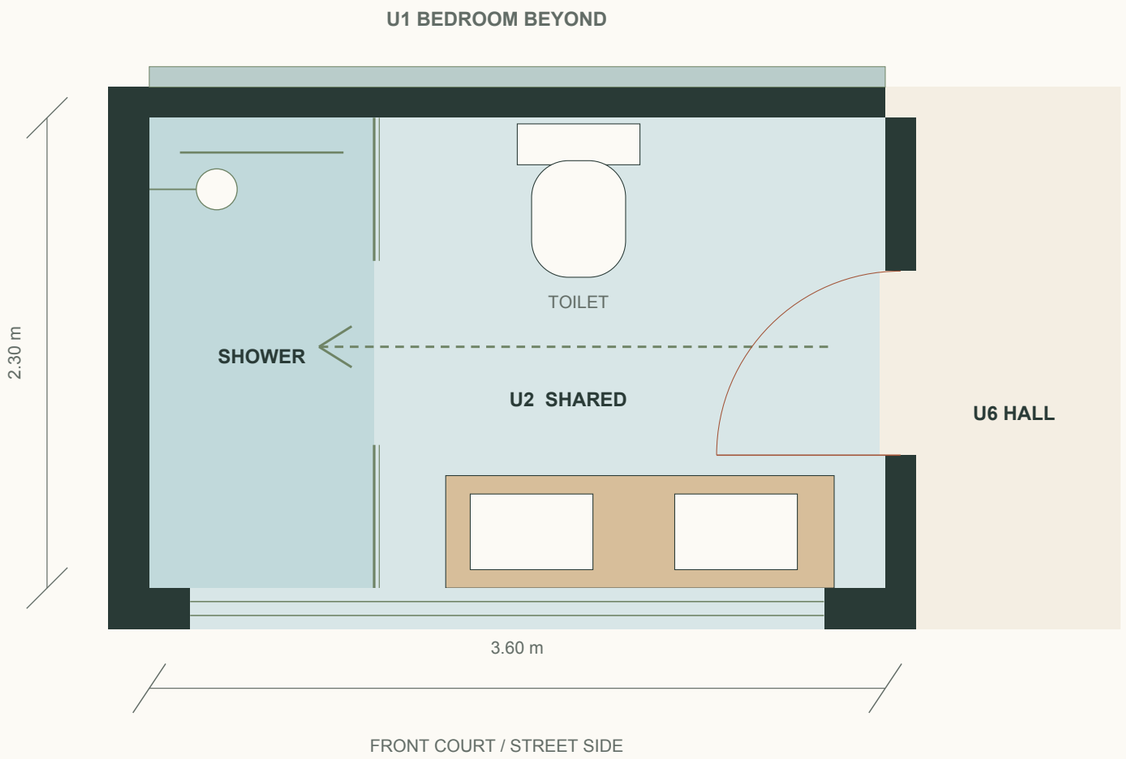

Ground-floor service dimensions

SPACE / ITEM	Meters	Feet / reference
G2 / Bathroom	2.00 x 2.30 m	6.56 x 7.55 ft
G3 / Recessed laundry bay	1.45 x 1.30 m	4.76 x 4.27 ft
G8 / Passage	1.45 x 1.00 m	4.76 x 3.28 ft

D2 opens into G6 and encloses G3 + G8 together. The 1.00 m-deep passage stays free of door swings; its hall doorway is 0.90 m nominal. G2 opens inward. Loading still uses G8 temporarily. Ventilate the enclosure to suit the chosen washer/dryer; see page 5.

Upper bathroom dimensions


SPACE / ITEM	Meters	Feet / reference
U2 / Open shared bathroom	3.60 x 2.30 m	11.81 x 7.55 ft
Far-end walk-in shower	1.10 x 2.30 m	3.61 x 7.55 ft
Double vanity	1.90 x 0.55 m	6.23 x 1.80 ft
Shower entry / nominal	0.90 m	2.95 ft

The shower remains at the far end, with no separate toilet compartment. A single high obscure-glass opening replaces the two front windows. Its sill is 1.75 m above this floor; coordinate mirrors, shower-screen junction and high-level operation. See page 10.

Adopted heights and the revised stair.

Height diagram: vertical dimensions at 1:50 / stair plan at 1:50 / provisional structure and site levels

Finished floors and clear ceilings

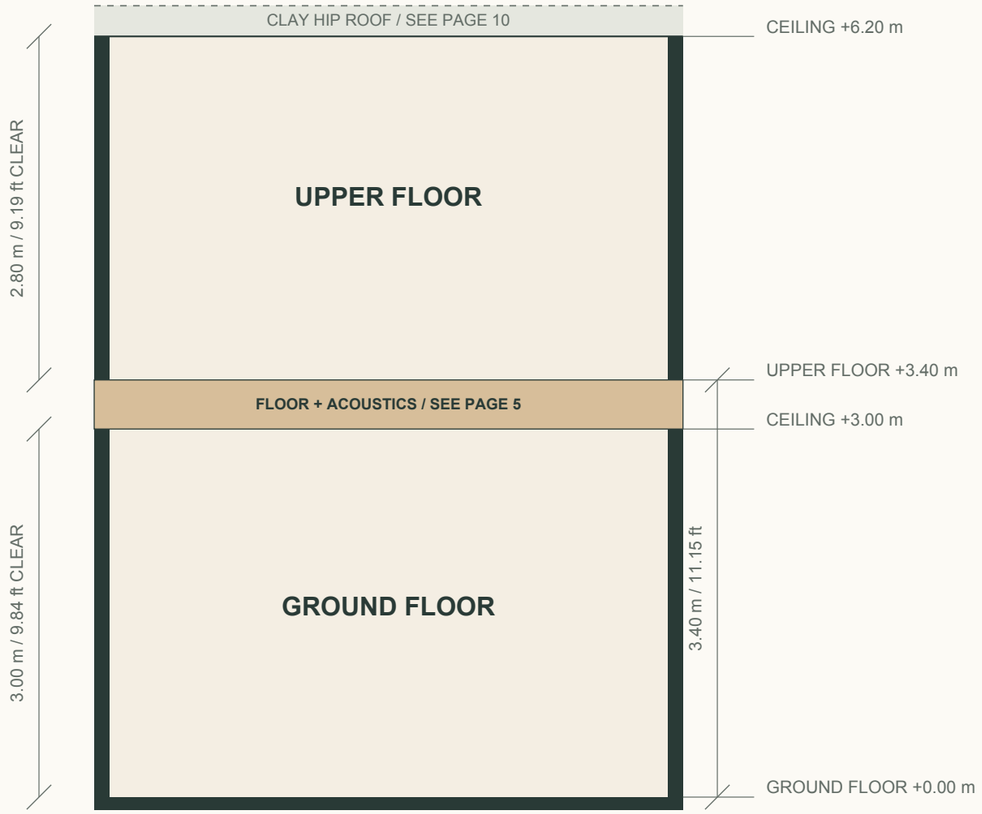


Height references

SPACE / ITEM	Meters	Feet / reference
Ground / clear ceiling	3.00 m	9.84 ft
Upper / clear ceiling	2.80 m	9.19 ft
Ground-to-upper floor	3.40 m	11.15 ft
Floor assembly allowance	0.40 m	1.31 ft
Upper ceiling above datum	6.20 m	20.34 ft

The 0.40 m covers structure, finishes, acoustics, services and any isolated ceiling; layer thicknesses remain unresolved. Coordinate this stack with the stairs. Selected roof levels: page 10. Actual site levels remain unassigned.

20 risers connect the two floors

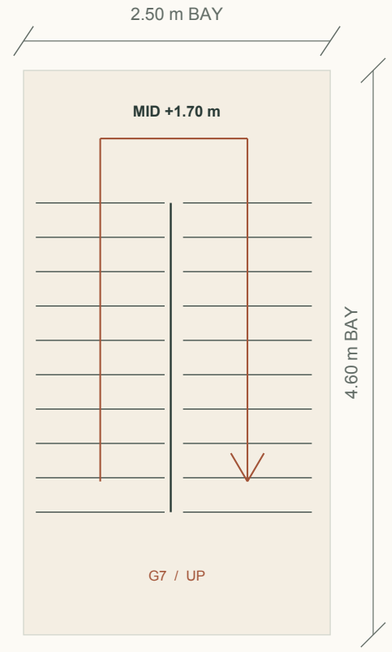

20 x 0.170 m = 3.40 m

Two flights of 10 risers, with nine 280 mm treads per flight. Each run is 2.52 m. The turning landing is at +1.70 m.

D1 closes the stair at ground level

The new door swings into G6, outside the landing. The front entrance moves 0.20 m left to separate the two nominal door sweeps. See the enlarged entrance study on page 4.

Keep the stair opening clear

The opening covers both flights and the turning landing. Final beam positions, services, handrails, guards and clear headroom need coordinated architectural and structural sections.

Stair references


SPACE / ITEM	Meters	Feet / reference
Riser / 20 total	0.170 m	0.56 ft
Tread depth	0.280 m	0.92 ft
Run per flight / 9 treads	2.52 m	8.27 ft
Flight / turning landing	1.05 m	3.44 ft
Front arrival landing	1.00 m	3.28 ft
Reserved stair bay	2.50 x 4.60 m	8.20 x 15.09 ft
Upper stair opening	2.25 x 3.59 m	7.38 x 11.78 ft

Nominal dimensions before detailed finishes and rail design. The stair arithmetic and plan fit are checked; local compliance and final headroom are not certified.

Three layout changes for everyday quiet.

Living detail at 1:50 / entrance detail at 1:40 on A3 at 100% / nominal dimensions before final hardware and finishes


Living / exterior-wall TV and a clear route

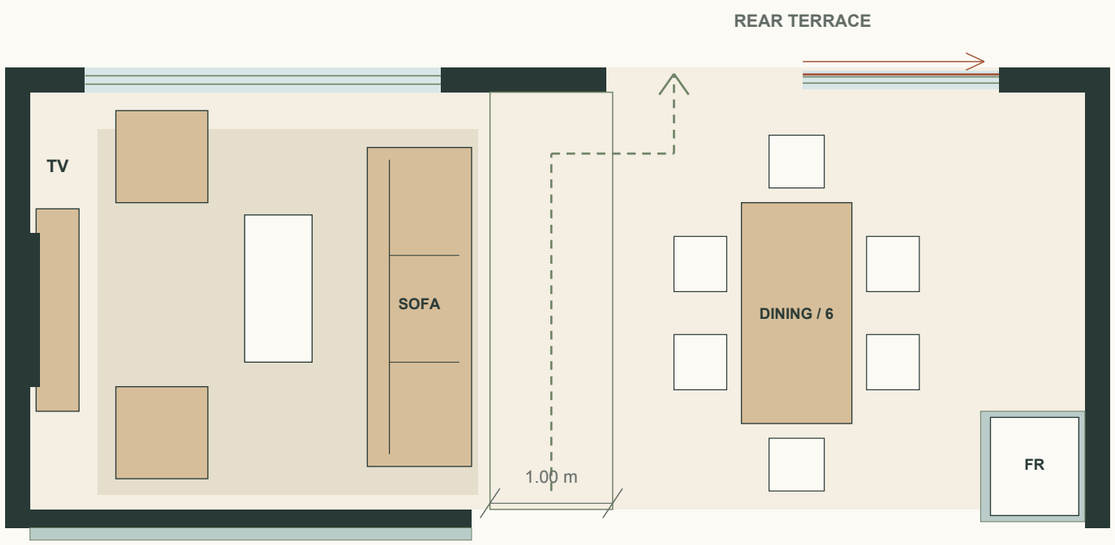

G1 BEDROOM / TV REMOVED FROM THIS WALL

KITCHEN BEYOND

Entrance / doors close outside the landings

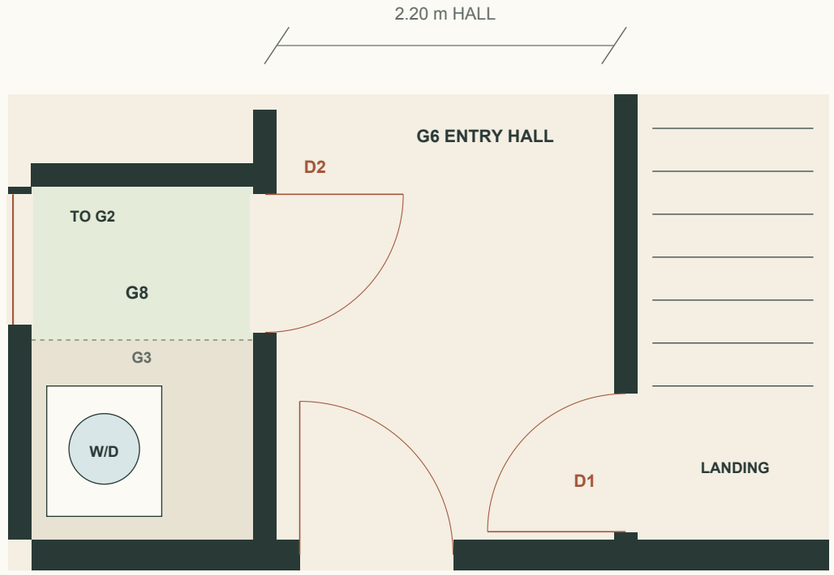

D0 / FRONT DOOR

Living / nominal reference dimensions

SPACE / ITEM	Meters	Feet / reference
Three-seat sofa	0.85 x 2.60 m	2.79 x 8.53 ft
Media console	0.35 x 1.65 m	1.15 x 5.41 ft
Route beside seating	1.00 m	3.28 ft
Acoustic lining reserve	0.10 m	0.33 ft

The sofa faces the left exterior wall; two chairs complete the seating group. A nominal 1.00 m route runs between the sofa and dining furniture, then turns toward the rear doors. Check final chair pull-out and door hardware during furnishing selection.

AW1 linings sit inside the bedrooms. Ground G1 loses 0.10 m along each front/rear wall and its hall wall; U1 loses 0.10 m at its bathroom and hall walls; U5 loses 0.10 m at its stair/hall wall. Revised room sizes appear on page 6.

Doors / nominal leaf and passage sizes

SPACE / ITEM	Meters	Feet / reference
D0 / front entrance	1.00 m	3.28 ft
D1 / stair door	0.90 m	2.95 ft
D2 / service door	0.90 m	2.95 ft
G8 / passage depth	1.00 m	3.28 ft
D0 / move left	0.20 m	0.66 ft

D1 swings into G6, outside the stair landing. D2 also swings into G6, leaving G8 free of door sweeps. The nominal D0/D1 sweep envelopes are separated by 0.225 m. Hardware and finished clear openings remain to be detailed.

G3 and G8 form one enclosed laundry/service vestibule. A separate cabinet front would obstruct bathroom access. D2 provides the acoustic closure; G2 retains its own privacy door. Appliance loading temporarily occupies G8.

Construction and acoustic design brief.

Proposed materials and requirements to detail and price / street traffic plus general household noise / no acoustic performance claim yet

Structure, walls and roof

Starting system: engineered reinforced-concrete structure and foundations, concrete-masonry infill and concrete upper floor. The selected clay hip roof and tiled terrace roof need engineered supports, fixings and load paths; their structural system is not selected. Wall cores remain schematic.

Finish with ivory plaster, bronze frames, timber accents and clay roof tiles. Coordinate tile suitability at the proposed 30% slope, insulation, underlay, flashings, drainage and the exposed rear setback. Roof build-up and site levels remain open. [3]

AW1 / bedroom wall assemblies

Reserve 0.10 m on the marked dry bedroom faces for an independent lining: separated framing, mineral-wool cavity absorption and two gypsum layers, subject to a tested assembly fitting the reserve. Carry the separating wall to structure and seal junctions and penetrations. Keep outlets staggered and avoid rigid bridges through the lining. Wet-side backing and waterproofing are separate requirements. [1]

Request complete wall and floor test reports. STC describes airborne separation; IIC describes impact transmission through floor/ceiling assemblies. Do not assign either rating from a material name alone. [2]

AD1 / stair, service and bedroom doors

Use solid-core hinged leaves, robust frames, perimeter seals and compatible drop seals. D1 requires a continuous stair enclosure; D2 closes G3 + G8. Coordinate ventilation paths with the seals. Final leaf/frame ratings and installed clear widths are to be selected. [1]

AV1 / bedroom windows and quiet ventilation

Obtain traffic-noise test data for complete window assemblies, including frames and compression seals. Acoustic laminated glazing is a candidate; its makeup must follow the measured source and solar/thermal requirements. [4] Provide quiet ventilation and cooling with windows closed; detail attenuated air paths rather than relying on door gaps. [1]

AF1 / upper floor, top to bottom

Tile + compatible bedding / wet-area waterproofing where needed

Impact-isolation system + isolated perimeter joints

Engineered concrete floor structure / beams to coordinate

Services + isolated ceiling where required / finished ceiling

SPACE / ITEM	Meters	Feet / reference
Complete floor allowance	0.40 m	1.31 ft

Layer order only, not a thickness detail. Select a tile-compatible impact system with full floor/ceiling test evidence. Keep rigid edge connections from bypassing it. The 0.40 m total must fit all layers and services; if it cannot, revise the floor level and stair before construction documents. [2] [1]

AP1 / laundry, plumbing and equipment

Select the washer/dryer before service design. G3 + G8 needs appliance-specific heat removal, air supply, clearances and exhaust if applicable; do not seal the machines into an unventilated space. Isolate equipment vibration and pipe supports; locate pumps and condensers away from bedroom walls and neighboring windows. Service and vent routes are not yet drawn. [1]

Finishes and street boundary

Rugs, upholstery and selected absorptive surfaces address echo from hard finishes. [2] Front wall/gate treatment is a later pricing item, after site listening or measurement establishes the traffic exposure. No barrier height or noise reduction is assumed here.

Before selecting products

Record traffic during busy and quiet periods, including night. Set room-specific noise goals with the local designer, select matching tested assemblies, and obtain itemized quotations. This brief reserves space and defines scope; it is not an engineered acoustic design.

[1] YourHome / Noise control

[2] USG / Acoustics 101

[3] YourHome / Insulation

[4] Pilkington / Acoustic laminated glazing

Area, circulation and budget checks

Metric dimensions govern. Feet are decimal and rounded for reference. Areas are shown in square meters and square feet.

Where the 200 m² lot goes

SPACE / ITEM	Square meters / m²	Square feet / ft²
Main ground-floor footprint	94.5 m²	1,017.2 ft²
Front parking / entrance	58.0 m²	624.3 ft²
Nominal side passage	10.5 m²	113.0 ft²
Rear outdoor zone	37.0 m²	398.3 ft²
Total lot allocation	200.0 m²	2,152.8 ft²

Approximate internal room sizes

SPACE / ITEM	Meters	Feet / reference
G1 / Ground queen room	3.50 x 3.90 m 13.7 m²	11.48 x 12.80 ft 146.9 ft²
G2 / Ground shared bath / front	2.00 x 2.30 m 4.6 m²	6.56 x 7.55 ft 49.5 ft²
G3 / Recessed laundry bay	1.45 x 1.30 m 1.9 m²	4.76 x 4.27 ft 20.3 ft²
G5 / Living / dining reference	8.60 x 3.40 m 29.2 m²	28.22 x 11.15 ft 314.7 ft²
G4 / Kitchen reference	4.85 x 1.80 m 8.7 m²	15.91 x 5.91 ft 94.0 ft²
U1 / Upper two-double room	4.50 x 4.00 m 18.0 m²	14.76 x 13.12 ft 193.8 ft²
U2 / Open upper shared bathroom	3.60 x 2.30 m 8.3 m²	11.81 x 7.55 ft 89.1 ft²
U5 / Primary bedroom	3.85 x 4.25 m 16.4 m²	12.63 x 13.94 ft 176.1 ft²
U4 / Primary dressing / storage	4.60 x 2.40 m 11.0 m²	15.09 x 7.87 ft 118.8 ft²

Bedroom sizes deduct lining reserves. G4/G5 are reference subzones of one open space; the fridge extends into former G5. No partition is implied. Gross floor area includes walls.

Privacy and everyday use

Both bathrooms have showers. D2 encloses laundry/service; loading uses G8. Eight sleepers share the two double beds. Indoor dining seats six; terrace dining seats eight. Living seats five.

Local cost planning

Construction + site works	Local quote
Design, studies and permits	Local quote
Furniture and appliances	Local quote
Contingency	To be assessed
Total, excluding land	To be priced

Unpriced working allocation. Obtain separate quotations for acoustic linings, sealed doors/windows, floor isolation and ventilation. Price the clay hip roof, tiled canopy and wider bathroom lintel as added scope. No roof or acoustic upgrades are proven to fit this target.


Furniture and stair references

SPACE / ITEM	Meters	Feet / reference
Lot / frontage x depth	10.00 x 20.00 m	32.81 x 65.62 ft
Queen mattress	1.52 x 2.03 m	4.99 x 6.66 ft
King mattress	2.00 x 2.00 m	6.56 x 6.56 ft
Each double mattress	1.35 x 1.90 m	4.43 x 6.23 ft
Indoor dining / six seats	0.90 x 1.80 m	2.95 x 5.91 ft
Reserved stair zone	2.50 x 4.60 m	8.20 x 15.09 ft
Provisional floor-to-floor	3.40 m	11.15 ft
Riser / 20 total, 10 per flight	0.170 m	0.56 ft
Tread depth	0.280 m	0.92 ft
Run per flight / 9 treads	2.52 m	8.27 ft
Flight / turning landing	1.05 m	3.44 ft
Front arrival landing	1.00 m	3.28 ft

Stair arithmetic fits the reserved zone. Headroom, guards, finished clear widths, structure and local compliance need professional review. Furniture and cabinetry remain subject to selection and clearance checks.

An L-shaped kitchen, open toward dining.

Six indoor seats / eight on the terrace / enlarged schematic plan at approximately 1:33 / metric dimensions govern

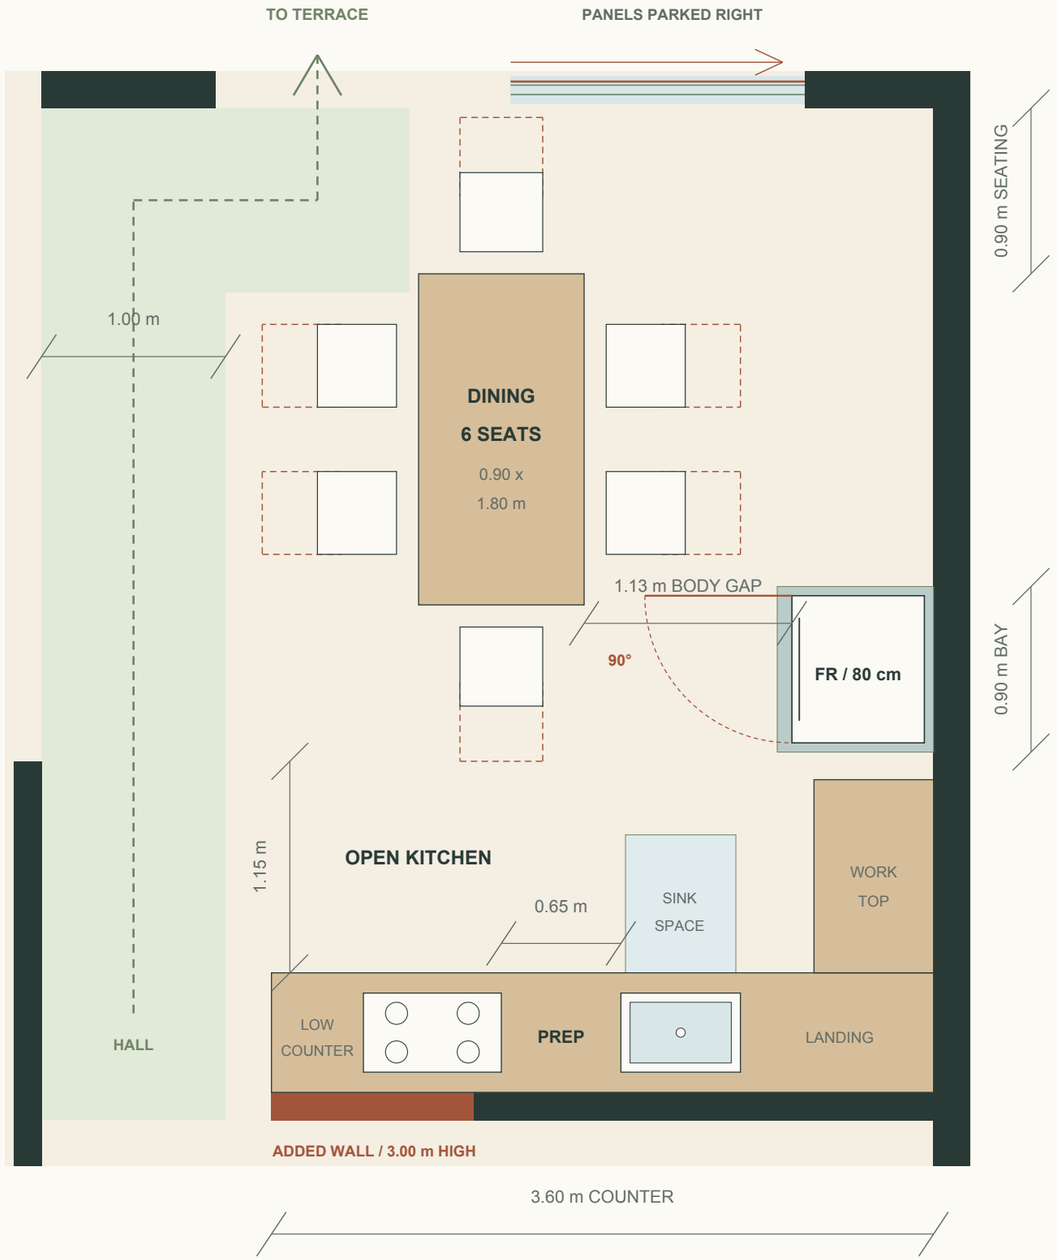

Solid chairs: drawn. Dashed: 0.30 m outward movement test.

Blue: sink standing test. Terracotta: added wall and fridge sweep. The return adds worktop; no sink or appliance is added to it. Rear chair space is reserved for seating, with terrace access on the left.

Kitchen and dining dimensions

SPACE / ITEM	Meters	Feet / reference
Long counter / length x depth	3.60 x 0.65 m	11.81 x 2.13 ft
Return / width x length	0.65 x 1.05 m	2.13 x 3.44 ft
Fridge bay / width x projection	0.90 x 0.85 m	2.95 x 2.79 ft
Fridge move toward dining	1.05 m	3.44 ft
Added wall / length x thickness	1.10 x 0.15 m	3.61 x 0.49 ft
Wall / full clear height	3.00 m	9.84 ft
Indoor table / six seats	0.90 x 1.80 m	2.95 x 5.91 ft
Clear prep / cooktop to sink	0.65 m	2.13 ft
Counter to pulled front chair	1.15 m	3.77 ft
Table to closed fridge body	1.13 m	3.71 ft
Retained living-side route	1.00 m	3.28 ft
Rear table edge to wall / seating	0.90 m	2.95 ft

Clearance study / design limits

Open-plan fit: G4/G5 remain reference subzones. The fridge extends into the former dining allocation; the cabinet, return and bay are checked against their combined open space. The new 1.10 m wall joins the stair wall behind the entire counter.

Operation: the nominal 90-degree fridge sweep clears the return, sink standing test and all six chairs, including 0.30 m pull-out. Left-side circulation stays 1.00 m into the slider opening. The return corner remains accessible from the kitchen side.

Furniture limit: the tested rear chair ends only 0.05 m (0.16 ft) from the wall. This is a schematic chair movement test, not a verified occupied-body clearance. Do not use the rear seating zone as a through-route.

Before detailing: verify refrigerator depth, handles, ventilation and drawer-removal angle; select chairs; coordinate oven/hood requirements and wall construction. Sink and cooktop positions stay fixed. No new oven format is selected.

A windows, B roofs: the selected exterior

5.80 m front court / 4.80 m planning car / 3.70 m rear zone with the same 3.00 m terrace

STREET / FRONT COURT



REAR / COVERED TERRACE



A supplies the high bathroom ribbon, two wider stair windows, ivory plaster and slim entry shade. B supplies the clay hip roof and tiled terrace canopy. The latest 5.80 m court, 4.80 m car and 0.70 m rear strip remain. Rear interior shows the restored L and six-seat table. Views are illustrative; measured plans and page 10 govern.

FRONT COURT / PARKING CLEARANCES

SPACE / ITEM	Meters	Feet / reference
Street boundary to house	5.80 m	19.03 ft
Car length / planning allowance	4.80 m	15.75 ft
Vehicle gate / clear opening	3.60 m	11.81 ft
Boundary / house bumper gaps	0.55 / 0.45 m	1.80 / 1.48 ft

FOOTPRINTS / REAR TERRACE


SPACE / ITEM	Meters	Feet / reference
Ground floor envelope	9.00 x 10.50 m	29.53 x 34.45 ft
Upper floor envelope	9.00 x 9.50 m	29.53 x 31.17 ft
Rear zone / beyond canopy	3.70 / 0.70 m	12.14 / 2.30 ft
Covered terrace	6.00 x 3.00 m	19.69 x 9.84 ft

The original three-version study remains in design/style-study-01. This hybrid is the current direction. Roof and window schedules: page 10; gate operation: page 9. Roof support, drainage, glazing, safe window operation and cost remain unverified.


One sliding gate. A clear route to the street.

Single leaf covers the vehicle entrance when closed / slides right behind the fixed fence / plan views at approximately 1:60

CLOSED / ONE COMPLETE VEHICLE GATE

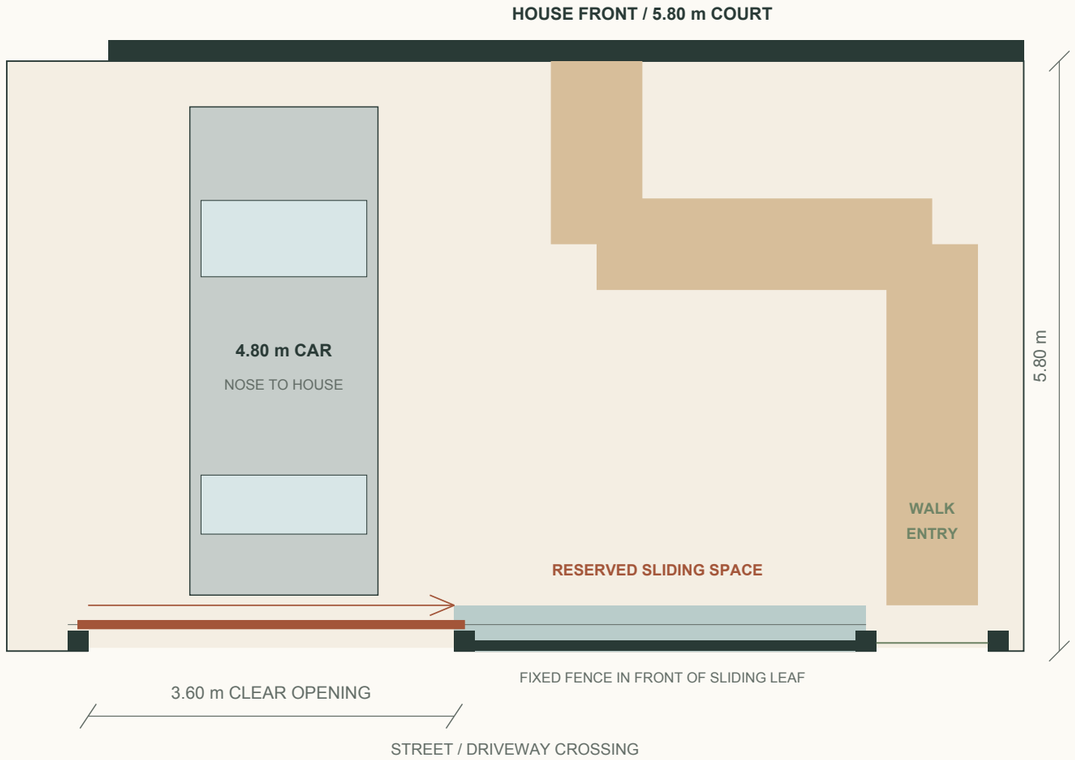

OPEN / CAR REVERSES STRAIGHT OUT

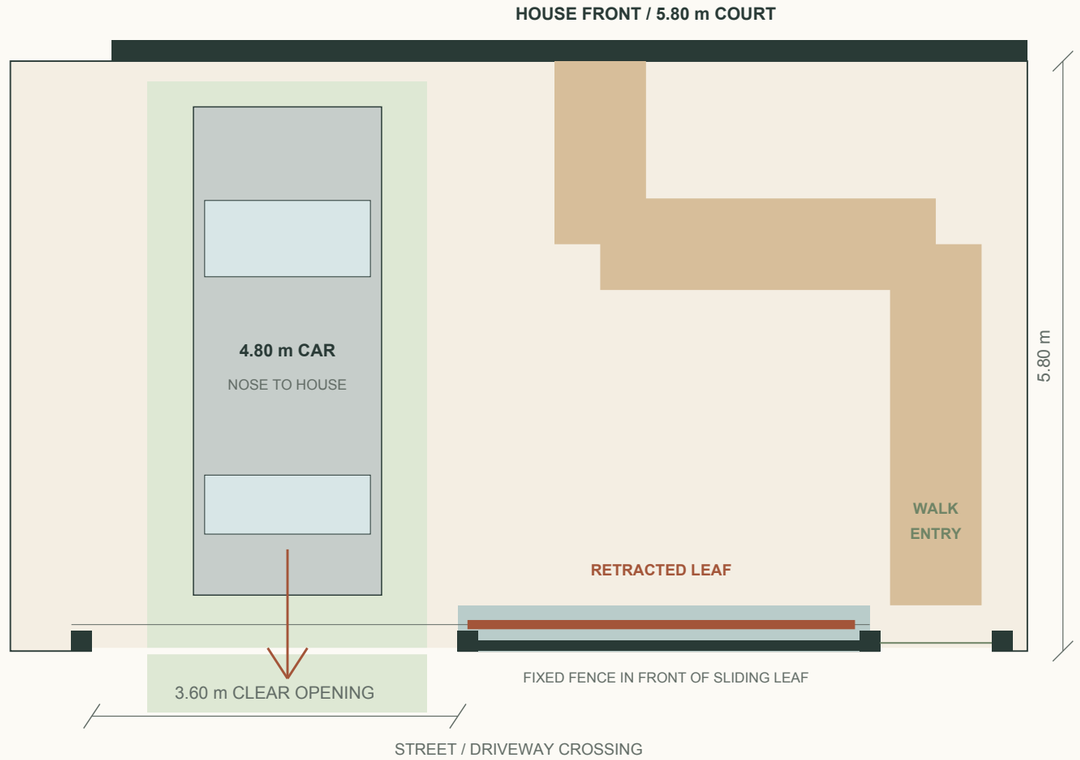

Gate dimensions / planning allowances

SPACE / ITEM	Meters	Feet / reference
Vehicle opening / between posts	3.60 m	11.81 ft
Moving leaf / total length	3.80 m	12.47 ft
Leaf travel / closed to open	3.80 m	12.47 ft
Reserved runback / length x depth	4.05 x 0.45 m	13.29 x 1.48 ft
Separate pedestrian opening	1.10 m	3.61 ft

Terracotta: moving leaf. Dark green: fixed posts and fence. Pale blue: reserved sliding space. Green: clear vehicle corridor when open.

How the gate works

A single leaf covers the entire vehicle opening when closed. It slides right on a parallel track behind the fixed center fence. All posts sit outside the clear opening, and the open leaf is beyond the car route. The pedestrian gate remains separate at the far right.


Reserve the complete sliding space for the gate and its hardware. Keep planting, storage and the pedestrian route outside it. The court is 5.80 m deep for a 4.80 m car. Rear bumper: 0.55 m from the boundary, approximately 0.25 m from the closed leaf before hardware. Nose: 0.45 m from the house. The 3.60 m opening is retained.

Final gate frame, guides, track, stops and any automation require fabrication details. Coordinate a flush driveway crossing, drainage and the curb transition with actual street levels. This plan checks straight passage through the gate; street turning and the selected vehicle remain to be checked on site.


Selected windows and clay-roof geometry.

A opening layout and ivory/bronze palette + B main and terrace roofs / Concept 11 site retained / relative levels from ground finished floor


FRONT ELEVATION / OPENINGS IN THEIR ROOMS

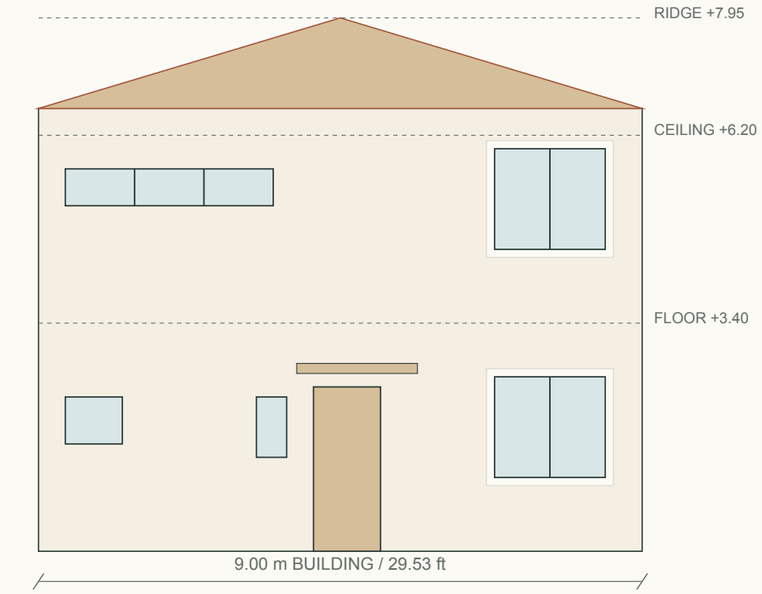

ROOFS WITHIN LOT

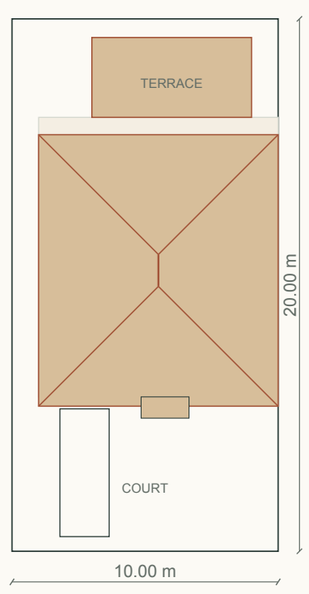

SIDE PROFILE / ROOF HEIGHT ADDED SEPARATELY

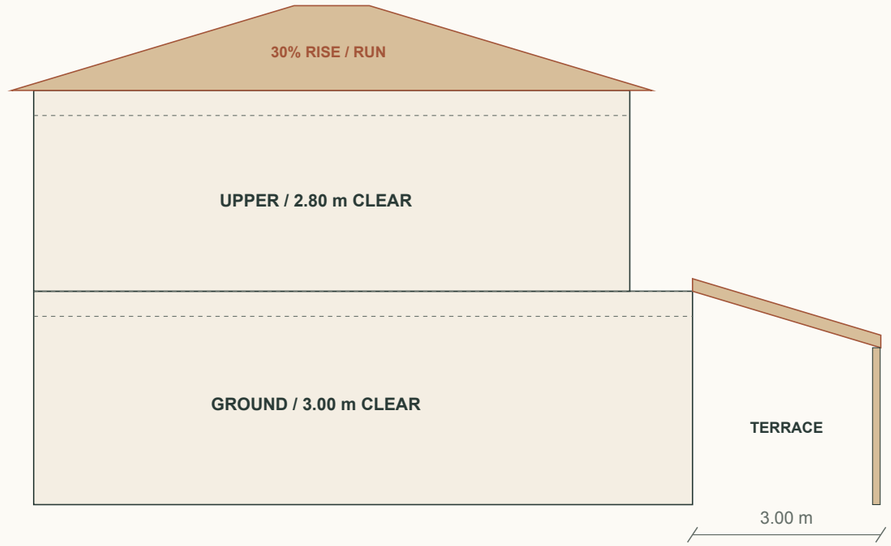

A / front opening and entrance schedule

SPACE / ITEM	Meters	Feet / reference
Upper bathroom / W x H	3.10 x 0.55 m	10.17 x 1.80 ft
Bathroom sill / head above datum	5.15 / 5.70 m	16.90 / 18.70 ft
Bathroom sill above upper floor	1.75 m	5.74 ft
Each stair opening / W x H	1.65 x 1.50 m	5.41 x 4.92 ft
Stair sills / ground, upper	1.10 / 4.50 m	3.61 / 14.76 ft
Stair heads / ground, upper	2.60 / 6.00 m	8.53 / 19.69 ft
Stair reveal / projection	0.20 m	0.66 ft
Entry canopy / width x projection	1.80 x 0.80 m	5.91 x 2.62 ft
Entry canopy / clear soffit	2.65 m	8.69 ft

Bathroom: three obscure-glass modules within one opening. The opening stays in U2 above the shower/vanity zone; coordinate the lintel, mirrors, glass-screen junction and operating hardware. Stair: retain two separate inward-opening units and a solid floor band; guards, sash clearance and safe cleaning reach need detailing.

B / roofs translated to the current site


SPACE / ITEM	Meters	Feet / reference
Main roof / eave level	6.60 m	21.65 ft
Main roof / highest ridge	7.95 m	26.08 ft
Ridge above upper ceiling	1.75 m	5.74 ft
Main roof footprint / W x D	9.00 x 10.20 m	29.53 x 33.46 ft
Front / rear eave projection	0.35 m	1.15 ft
Side eave projection	0.00 m	0.00 ft
Terrace roof / low, high top	2.70 / 3.60 m	8.86 / 11.81 ft
Terrace / outer clear soffit	2.50 m	8.20 ft
Terrace roof / W x D	6.00 x 3.00 m	19.69 x 9.84 ft

Both tile roofs use 30% rise/run provisionally. Structure, tile-system pitch compatibility, fixing, underlay, drainage and the exposed 1.00 m rear setback junction remain to be designed and priced. Pages 11-13 coordinate proposed drainage, including an inset boundary gutter. Its size may change the roof edge. Costs require local pricing.

Keep roof water inside the property.

Recommended next detail: an inset right-side gutter, separate terrace drainage and visible emergency outlets

PROPOSED COLLECTION PATHS

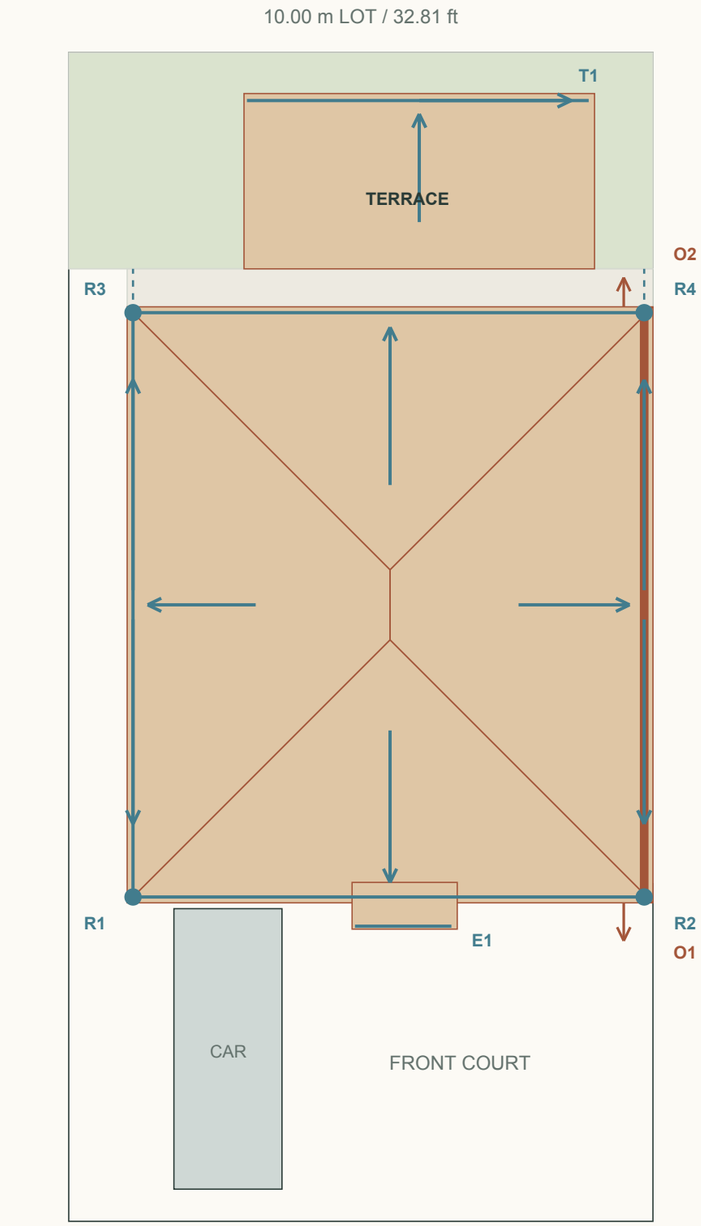

Blue: primary collection / dots: outlet zones

Orange: boundary detail + O1/O2 overflow faces / symbols not to scale

The boundary edge is the first constraint

The current roof reaches lot x=10.00 m. An added outside gutter would cross the boundary. Develop a lined collection channel inside that edge, with the tile termination pulled back as needed. Its width, depth and roof support still have to be designed.

Geometry consequence: a real gutter occupies space. Its reserve changes the tiled edge and may affect the hip/ridge geometry. Reconcile that detail before issuing a new roof layout; do not assume every Concept 12 roof dimension survives unchanged.

Main roof: four collection zones

R1-R4 are candidate outlet zones near the four corners. Split each long side gutter toward front and rear; the front and rear eaves feed their adjacent corners. Pipe count and capacity remain a hydraulic-design decision. O1/O2 mark candidate emergency discharge faces; exact outlet heights and receiving details are unresolved. Keep downpipes on opaque wall piers, clear of glazing, gate travel and entrances.

R3/R4 need a supported transfer across the upper rear setback before descending at the lower rear wall. Keep this route outside the rooms and separate from the terrace roof. Locate inspection access at every concealed change of direction.

Terrace, setback and entry each need collection

T1 collects the terrace at its low garden edge; keep the gutter within the 6.00 x 3.00 m overall envelope. The 1.00 m upper rear setback needs its own continuous waterproofing and outlet. E1 drains the small entry shade away from the doorway. Do not dump upper-roof water onto the terrace tiles or entry path.

Connect to a verified site drainage system


Take the downpipes to accessible site collection points. Survey the street and floor levels, establish the permitted receiving system and check gravity fall before routing buried pipes. A connection to the street or sanitary drain is not assumed. Keep ordinary and emergency discharge inside the property until a permitted outfall is confirmed.

Concept 12 and the original style study remain intact. These pages propose drainage relationships; they do not resize the roof, alter room areas or establish a final drainage installation.


Resolve the edges before the tile order.

Schematic coordination sections / gutter widths, upstands, falls and pipe diameters are intentionally not specified

Right boundary / inset channel

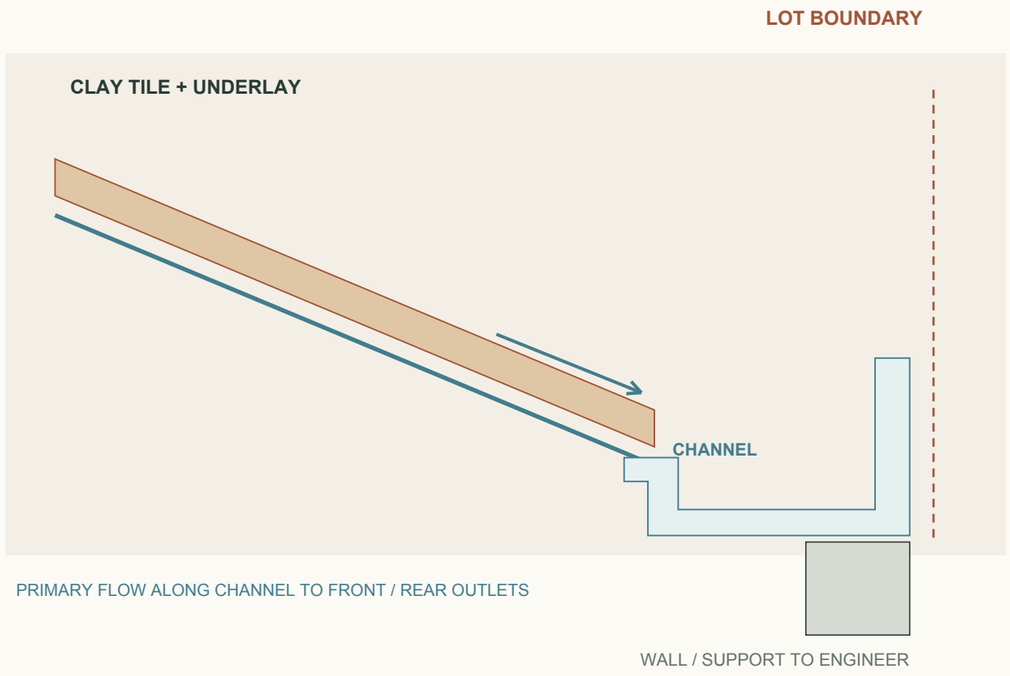

Rear setback / canopy junction

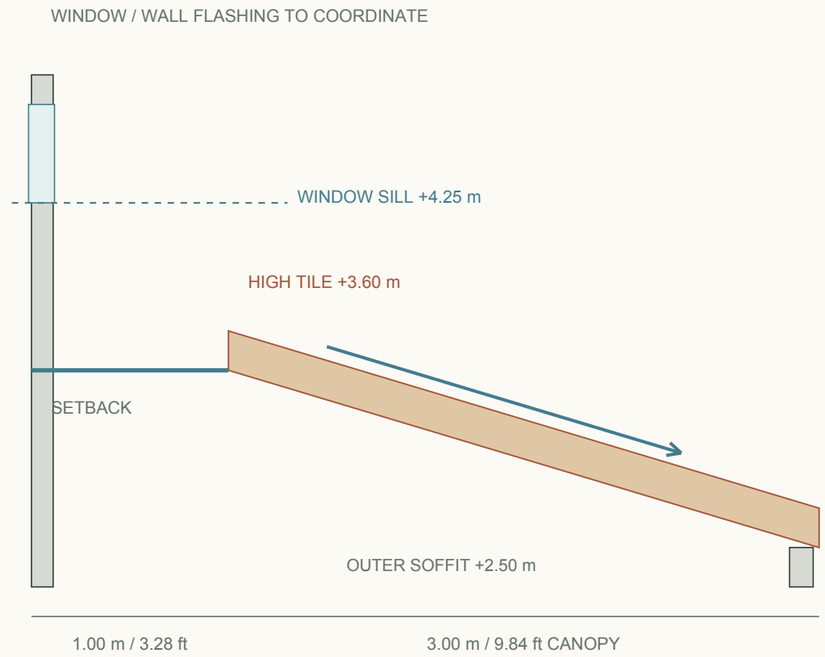

What this detail must demonstrate

1. A continuous compatible lining, roof-underlay discharge into it, supported edges and provision for movement. Keep joints inspectable; test the lined channel before covering adjacent work. [2]

2. Primary outlets plus a separate overflow path positioned above normal drainage but below the level that would allow water into the building. Discharge overflow visibly on an in-lot front/rear face, away from the doorway and neighbor. Final elevations require design. [3]

3. Safe access to clean the full channel, outlets and roof junctions. A narrow void behind the roof is not a maintenance strategy. Detail access from the property with the roof contractor; do not assume walking directly on tiles. [4]

The sketch reserves a relationship, not a channel size. Structure, lining material, edge heights and water capacity remain open.

Keep the water paths independent

The upper roof ends above the 1.00 m rear setback. Waterproof the entire setback, including the portion below the upper eave, and carry the membrane into a flashed junction at the terrace attachment. The canopy high edge is 0.20 m above the +3.40 m floor datum; its actual support and wall termination need a section.

The selected canopy top at +3.60 m leaves 0.65 m below the upper window sill. That is a geometric difference, not a verified flashing or access clearance. Keep upper-roof downpipe discharge in a pipe through the transfer, rather than spilling across this junction.

Provide a low-edge terrace gutter with an inspectable outlet at an outer post zone. Coordinate its depth, beam/soffit and tile edge while retaining the 2.50 m outer clear soffit and the 0.70 m strip beyond the canopy.

Tile slope check: 30% is about 16.7 degrees, not 30 degrees. The chosen tile assembly must suit the local exposure and roof lengths. [1]

Give the designer quantities and decisions.

Retained Concept 12 roof quantities before any gutter inset / no product order, pipe sizing or construction budget established

Retained dimensional basis

ITEM	Meters	Feet / reference
Main roof / width x depth	9.00 x 10.20 m	29.53 x 33.46 ft
Main roof / eave, ridge	6.60 / 7.95 m	21.65 / 26.08 ft
Rear setback / depth	1.00 m	3.28 ft
Terrace roof / width x depth	6.00 x 3.00 m	19.69 x 9.84 ft
Strip beyond canopy	0.70 m	2.30 ft
Entry shade / width x depth	1.80 x 0.80 m	5.91 x 2.62 ft

Horizontal roof areas for catchment review

ITEM	Square meters	Square feet / ref.
Main / front hip	20.25 m²	217.97 ft²
Main / rear hip	20.25 m²	217.97 ft²
Main / each side plane	25.65 m²	276.09 ft²
Main roof / total	91.80 m²	988.13 ft²
Terrace roof	18.00 m²	193.75 ft²

Main total: 20.25 + 20.25 + 2 x 25.65 = 91.80 m². Recalculate areas when the inset gutter and roof edges are resolved. The setback and entry shade also need drainage; the designer must account for overlapping coverage and any upstream pipe contributions.

Tile-surface reference, excluding laps / waste

ITEM	Square meters	Square feet / ref.
Main at 30% slope	95.84 m²	1031.63 ft²
Terrace at 30% slope	18.79 m²	202.28 ft²

Geometric area only, using horizontal area x sqrt(1 + 0.30²). Not order quantities; hips, ridges, cuts, laps, wastage and the revised gutter geometry remain to be measured.

Issue this scope for coordinated design and pricing

Roof contractor + architect

Confirm the actual clay tile, minimum pitch for local exposure, fixing, underlay, ventilation, roof access and warranties. Price the complete roof assembly, not tiles alone.

Structural engineer

Resolve roof and gutter supports, wet and maintenance loads, wind attachment, corrosion protection and the terrace junction. Keep the clear room and terrace heights coordinated.

Drainage designer

Use an accepted local rainfall basis and actual contributing areas. Size gutters, primary and overflow outlets, downpipes and site drains; check slopes, blockage cases and the final receiving system.

Architect + site survey

Locate pipes and cleanouts on opaque piers, review the rear setback transfer, and confirm clear routes at the gate, entry and side passage. Establish property and street levels.

Pricing return

Separate main roof, terrace roof, inset gutter, external gutters, primary/overflow outlets, pipes/cleanouts, waterproofed setback, safe access, site connection and testing. Costs require local pricing.

Reference principles / not local product specifications

[1] Tejas Borja / TB-12

The listed 30% minimum is conditional on roof length and exposure. Product example only; no tile or local supply selected.

[2] Copper Development Association / built-in gutters

Principles for lining, support, movement and positive drainage. These details do not specify copper or copy its material dimensions.

[3] Copper Development Association / overflow scuppers

A secondary outlet sits above normal drainage and limits water accumulation if the primary route blocks.

[4] Marley / roof maintenance

Marley advises against walking directly on tiles. Provide a professional access strategy appropriate to the chosen roof.