
Adopted heights, with a revised stair.

Clear ceilings: ground 3.00 m / upper 2.80 m | Floor-to-floor 3.40 m, provisional | Plans at 1:100 on A3 at 100%

01 GROUND FLOOR



02 UPPER FLOOR

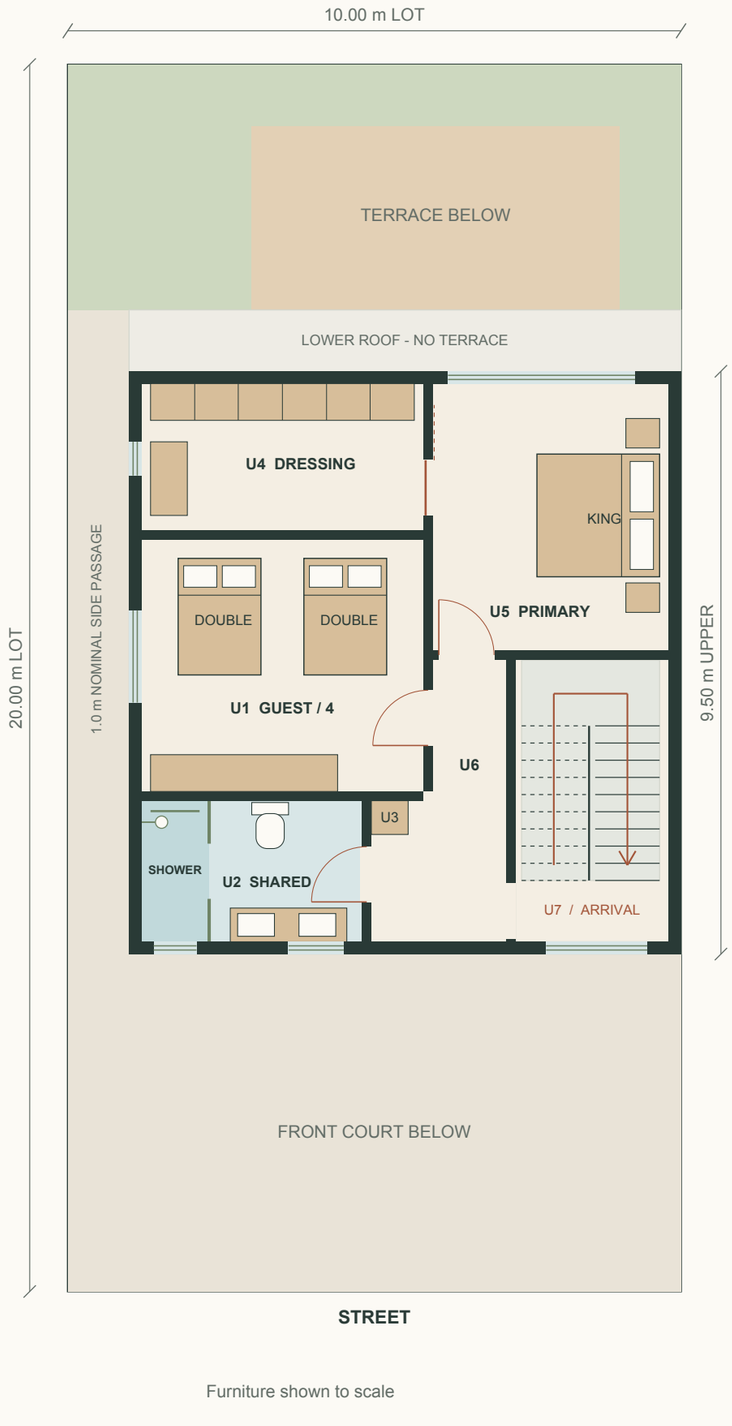

0 5 m — Windows — Door swings — Furniture shown to scale

3 bedrooms / 2 full bathrooms

Queen guest room downstairs; king primary and two-double guest room upstairs. Each floor has one shared, hall-accessed bathroom. Neither bedroom upstairs is an en suite.

The proposed fit

SPACE / ITEM	m²	ft² / ref.
Ground floor	94.5 m²	1,017.2 ft²
Upper, less stair void	77.4 m²	833.4 ft²
Combined floors	171.9 m²	1,850.6 ft²
Covered terrace, extra	18.0 m²	193.8 ft²

Areas include exterior walls and circulation; the upper stair opening is deducted. Municipal area rules may differ. Feet are rounded references; metric dimensions govern.

Heights and the longer stair

Ground ceiling: 3.00 m / 9.84 ft. Upper ceiling: 2.80 m / 9.19 ft. The 3.40 m / 11.15 ft rise uses 20 risers. The stair bay extends 0.30 m into the kitchen/primary-room side; see page 3 for the height and stair study.

Room arrangement

Ground / social + guest

G1 queen room; G2 front shared bath; G3 stacked laundry bay; G4 kitchen; G5 living/dining; G6 entry; G7 stair; G8 indoor passage.

Upper / shared bath

U1 two-double room; U2 open shared bath with a far-end shower, toilet and double vanity; U3 linen; U4 dressing/storage; U5 primary; U6 hall; U7 stair arrival.


Still schematic

Setbacks, boundary-wall permission, floor elevation, structure and services need local review. Front/rear orientation is schematic; no surveyed north is asserted.


Both bathrooms, with clear indoor access.

Enlarged bathroom studies / both at 1:30 on A3 at 100% / meter and feet reference columns below

Ground / bathroom and laundry

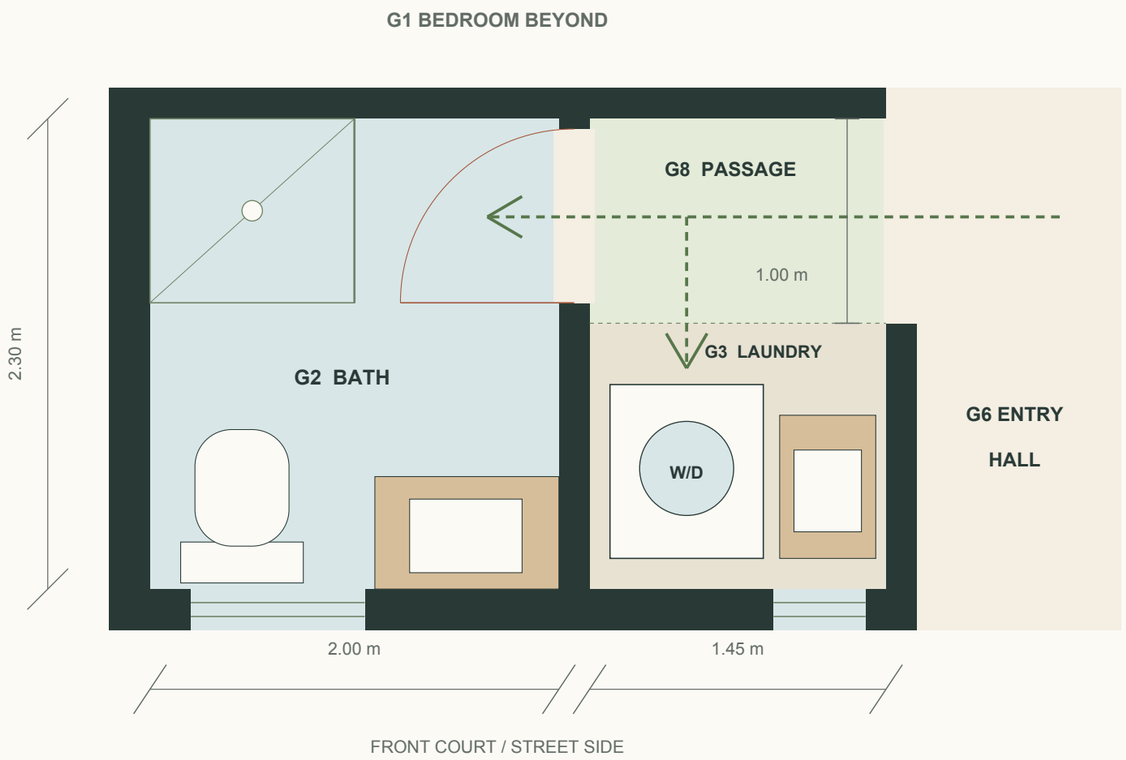

Upper / shower at the far end

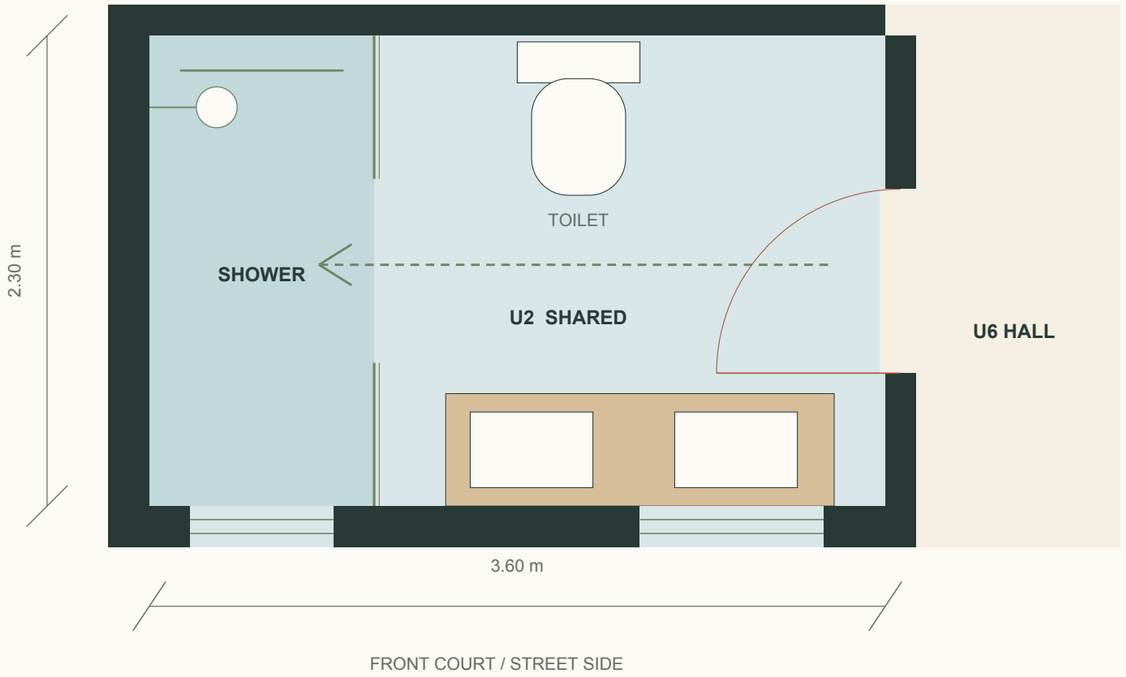

Ground-floor service dimensions

SPACE / ITEM	Meters	Feet / reference
G2 / Bathroom	2.00 x 2.30 m	6.56 x 7.55 ft
G3 / Recessed laundry bay	1.45 x 1.30 m	4.76 x 4.27 ft
G8 / Passage	1.45 x 1.00 m	4.76 x 3.28 ft

G6 leads through G8 to the bathroom and recessed laundry. The bathroom door opens inward. Stacked machines are shown in an open alcove; loading temporarily uses the passage. Verify appliance depth, services and any enclosure before fixing cabinetry.

Upper bathroom dimensions


SPACE / ITEM	Meters	Feet / reference
U2 / Open shared bathroom	3.60 x 2.30 m	11.81 x 7.55 ft
Far-end walk-in shower	1.10 x 2.30 m	3.61 x 7.55 ft
Double vanity	1.90 x 0.55 m	6.23 x 1.80 ft
Shower entry / nominal	0.90 m	2.95 ft

The former toilet compartment is removed. The shower is at the far end opposite the hall door, behind a glass screen. The toilet stays in the main bathroom. Final fixture, glazing, drainage and finished clearances need detailed review.

Adopted heights and the revised stair.

Height diagram: vertical dimensions at 1:50 / stair plan at 1:50 / provisional structure and site levels

Finished floors and clear ceilings

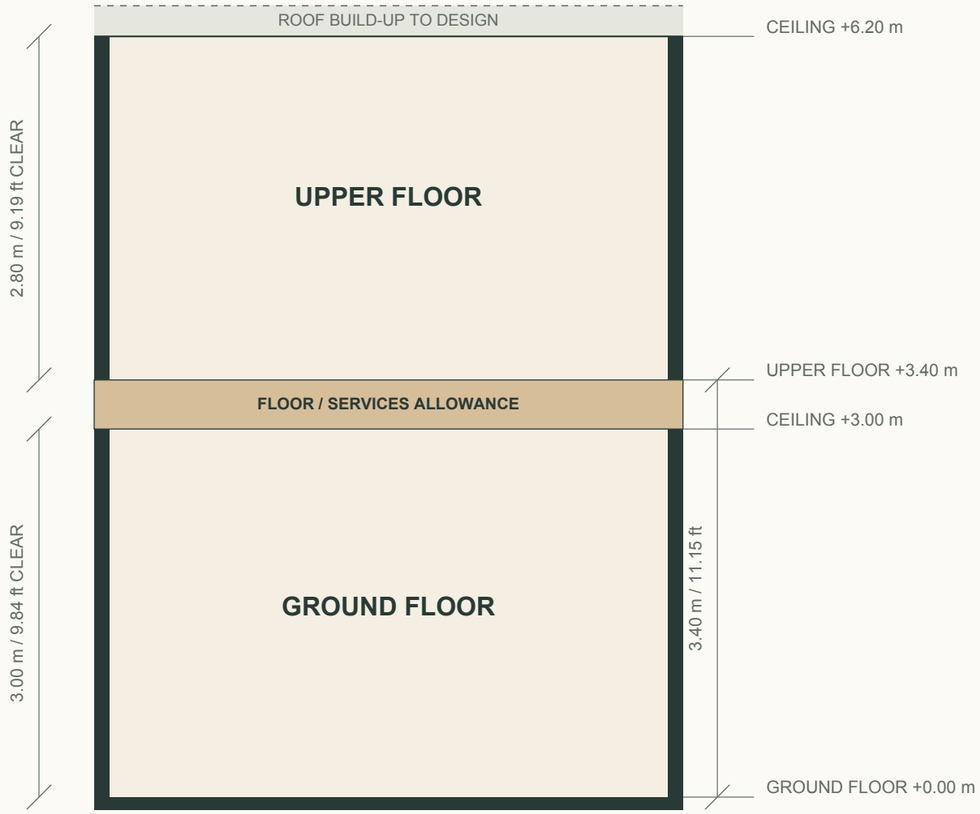


Height references

SPACE / ITEM	Meters	Feet / reference
Ground / clear ceiling	3.00 m	9.84 ft
Upper / clear ceiling	2.80 m	9.19 ft
Ground-to-upper floor	3.40 m	11.15 ft
Floor assembly allowance	0.40 m	1.31 ft
Upper ceiling above datum	6.20 m	20.34 ft

The 0.40 m allowance includes structure, finishes and services; it is not a slab specification. Ground-floor elevation above grade, roof build-up and parapet height remain to be set.

20 risers connect the two floors

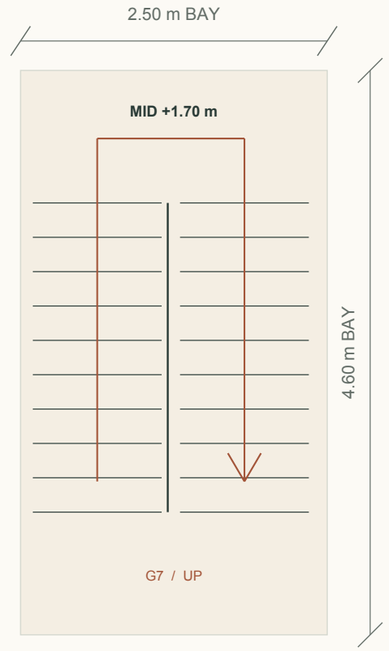

20 x 0.170 m = 3.40 m

Two flights of 10 risers, with nine 280 mm treads per flight. Each run is 2.52 m. The turning landing is at +1.70 m.

The plan changes by 0.30 m

The longer bay moves the kitchen counter and primary-room front wall toward the rear. The king bed remains in place; the primary room is now 3.85 x 4.35 m.

Keep the stair opening clear

The opening covers both flights and the turning landing. Final beam positions, services, handrails, guards and clear headroom need coordinated architectural and structural sections.

Stair references

SPACE / ITEM	Meters	Feet / reference
Riser / 20 total	0.170 m	0.56 ft
Tread depth	0.280 m	0.92 ft
Run per flight / 9 treads	2.52 m	8.27 ft
Flight / turning landing	1.05 m	3.44 ft
Front arrival landing	1.00 m	3.28 ft
Reserved stair bay	2.50 x 4.60 m	8.20 x 15.09 ft
Upper stair opening	2.25 x 3.59 m	7.38 x 11.78 ft

Nominal dimensions before detailed finishes and rail design. The stair arithmetic and plan fit are checked; local compliance and final headroom are not certified.

Area, circulation and budget checks

Metric dimensions govern. Feet are decimal and rounded for reference. Areas are shown in square meters and square feet.

Where the 200 m² lot goes

SPACE / ITEM	Square meters / m²	Square feet / ft²
Main ground-floor footprint	94.5 m²	1,017.2 ft²
Front parking / entrance	55.0 m²	592.0 ft²
Nominal side passage	10.5 m²	113.0 ft²
Rear outdoor zone	40.0 m²	430.6 ft²
Total lot allocation	200.0 m²	2,152.8 ft²

Approximate internal room sizes

SPACE / ITEM	Meters	Feet / reference
G1 / Ground queen room	3.60 x 4.10 m 14.8 m²	11.81 x 13.45 ft 158.9 ft²
G2 / Ground shared bath / front	2.00 x 2.30 m 4.6 m²	6.56 x 7.55 ft 49.5 ft²
G3 / Recessed laundry bay	1.45 x 1.30 m 1.9 m²	4.76 x 4.27 ft 20.3 ft²
G5 / Living + dining	8.60 x 3.40 m 29.2 m²	28.22 x 11.15 ft 314.7 ft²
G4 / Kitchen / transition	4.85 x 1.80 m 8.7 m²	15.91 x 5.91 ft 94.0 ft²
U1 / Upper two-double room	4.60 x 4.10 m 18.9 m²	15.09 x 13.45 ft 203.0 ft²
U2 / Open upper shared bathroom	3.60 x 2.30 m 8.3 m²	11.81 x 7.55 ft 89.1 ft²
U5 / Primary bedroom	3.85 x 4.35 m 16.7 m²	12.63 x 14.27 ft 180.3 ft²
U4 / Primary dressing / storage	4.60 x 2.40 m 11.0 m²	15.09 x 7.87 ft 118.8 ft²

Each room row shows width x depth, with area beneath. These are internal planning zones; do not add them as a gross-floor total. Conversions use the unrounded metric values. Rear outdoor space includes the covered terrace and uncovered patio.

Privacy and everyday use

Each shared bathroom has one toilet. Upstairs, the toilet is in the main room with no separate compartment. Laundry opens to G8, a 1.45 m² / 15.6 ft² passage. Use privacy glazing at wet-room windows. Eight guests assumes sharing each double bed.

Local cost planning

Construction + site works	Local quote
Design, studies and permits	Local quote
Furniture and appliances	Local quote
Contingency	To be assessed
Total, excluding land	To be priced

Provisional allowances, excluding land; no local quotation. Reprice the taller walls, revised stair, structure and bathroom scope before accepting this target. Preserve drainage, waterproofing and the patio when adjusting finishes or joinery.

Furniture and stair references

SPACE / ITEM	Meters	Feet / reference
Lot / frontage x depth	10.00 x 20.00 m	32.81 x 65.62 ft
Queen mattress	1.52 x 2.03 m	4.99 x 6.66 ft
King mattress	2.00 x 2.00 m	6.56 x 6.56 ft
Each double mattress	1.35 x 1.90 m	4.43 x 6.23 ft
Dining table / eight seats	2.20 x 0.95 m	7.22 x 3.12 ft
Reserved stair zone	2.50 x 4.60 m	8.20 x 15.09 ft
Provisional floor-to-floor	3.40 m	11.15 ft
Riser / 20 total, 10 per flight	0.170 m	0.56 ft
Tread depth	0.280 m	0.92 ft
Run per flight / 9 treads	2.52 m	8.27 ft
Flight / turning landing	1.05 m	3.44 ft
Front arrival landing	1.00 m	3.28 ft

Stair arithmetic fits the reserved zone. Headroom, guards, finished clear widths, structure and local compliance need professional review. Furniture and cabinetry remain subject to selection and clearance checks.

The same warm architectural character

Style reference retained from concept 01 / facade proportions and openings to follow the adopted heights and revised plans





Earlier AI-generated style reference, retained for materials and general character only. It has not been regenerated for the adopted heights or interior revisions. Use the plans and height study for dimensions; revise facade proportions and privacy glazing during design development.

01 / Confirm the envelope

Commission a boundary/topographic survey and obtain the parcel-specific municipal conditions. This concept depends on a side-boundary wall, a one-meter side passage and a covered terrace.

02 / Establish the site levels

Use a parcel-level drainage/flood assessment and geotechnical advice to set floor elevation and foundations. Confirm water, sewer and electrical connections before fixing equipment or service space.

03 / Price the same scope

Ask local professionals to price the same room schedule, finishes and inclusions. Separate tax, fees, furnishings, site works and contingency; resolve exclusions before approving design development.

Basis: client brief; municipal land-use requirements; 2014 municipal risk atlas.